





A DIVISION OF HY-TECH MACHINE, INC.

TYPE "C" DATA SHEET

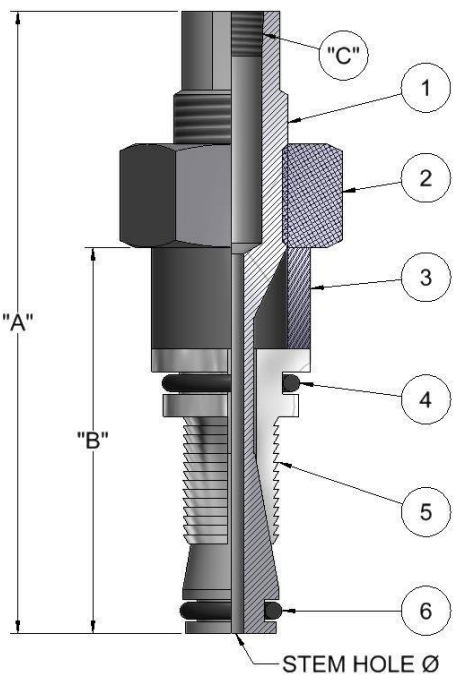

- ## PARTS LIST
1. MANDREL
 2. NUT
(5/8-18 UNF THREAD)
 3. WASHER
 4. O-RING (GRIP)
 5. GRIPS
 6. O-RING (SEAL)

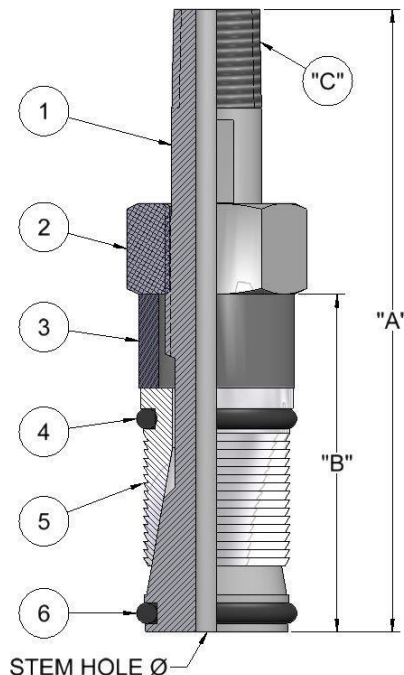

PIPE I.D. SIZES 0.466" – 0.674"

PIPE I.D. SIZES 0.710" – 1.000"

STOPPER SIZE	THAXTON PART #	NOMINAL PIPE SIZE	"A" DIM.	"B" DIM.	"C" DIM. N.P.T. THREAD	STEM HOLE Ø	SAFETY GAG PART #
0.466	C-.466-0-V	1/2" SCH. 160	3-7/16"	2.34"	1/8-27 (FEM.)	9/64"	SG-.5
0.472	C-.472-0-V	0.472 TUBE I.D.	3-7/16"	2.34"	1/8-27 (FEM.)	9/64"	SG-.5
0.493	C-.493-0-V	3/8" SCH. 40	3-7/16"	1.95"	1/8-27 (FEM.)	9/64"	SG-.5
0.527	C-.527-0-V	0.527 TUBE I.D.	3-7/16"	1.95"	1/8-27 (FEM.)	9/64"	SG-.5
0.546	C-.546-0-V	1/2" SCH. 80	3-7/16"	2.13"	1/8-27 (FEM.)	9/64"	SG-.5
0.600	C-.600-0-V	0.600 TUBE I.D.	3-7/16"	2.29"	1/8-27 (FEM.)	3/16"	SG-.5
0.614	C-.614-0-V	3/4" SCH. 160	3-7/16"	2.29"	1/8-27 (FEM.)	3/16"	SG-.75
0.622	C-.622-0-V	1/2" SCH. 40	3-7/16"	2.14"	1/8-27 (FEM.)	3/16"	SG-.5
0.630	C-.630-0-V	0.630 TUBE I.D.	3-7/16"	2.13"	1/8-27 (FEM.)	3/16"	SG-.5
0.633	C-.633-0-V	0.633 TUBE I.D.	3-7/16"	2.13"	1/8-27 (FEM.)	3/16"	SG-.5
0.635	C-.635-0-V	0.635 TUBE I.D.	3-7/16"	2.13"	1/8-27 (FEM.)	3/16"	SG-.5
0.674	C-.674-0-V	1/2" SCH. 10	3-7/16"	2.13"	1/8-27 (FEM.)	3/16"	SG-.5
0.710	C-.710-0-V	1/2" SCH. 5	3-3/4"	2.00"	1/4-18 (MALE)	1/4"	SG-.5
0.742	C-.742-0-V	3/4" SCH. 80	3-3/4"	1.97"	1/4-18 (MALE)	1/4"	SG-.75
0.760	C-.760-0-V	0.760 TUBE I.D.	3-3/4"	1.97"	1/4-18 (MALE)	1/4"	SG-.75
0.815	C-.815-0-V	1" SCH. 160	3-3/4"	2.00"	1/4-18 (MALE)	1/4"	SG-1
0.824	C-.824-0-V	3/4" SCH. 40	3-3/4"	2.03"	1/4-18 (MALE)	1/4"	SG-.75
0.880	C-.880-0-V	0.880 TUBE I.D.	3-3/4"	2.03"	1/4-18 (MALE)	1/4"	SG-.75
0.884	C-.884-0-V	3/4" SCH. 10	3-3/4"	1.86"	1/4-18 (MALE)	1/4"	SG-.75
0.896	C-.896-0-V	1-1/4" SCH. XX	3-3/4"	1.98"	1/4-18 (MALE)	1/4"	SG-1.25
0.906	C-.906-0-V	0.906 TUBE I.D.	3-3/4"	1.98"	1/4-18 (MALE)	1/4"	SG-1
0.920	C-.920-0-V	3/4" SCH. 5	3-3/4"	1.98"	1/4-18 (MALE)	1/4"	SG-.75

THAXTON PIPE STOPPERS ARE FACTORY TESTED UP TO 3,000 PSI, DEPENDING ON SIZE

SPECIAL SIZES AND HIGHER PRESSURES CAN BE SUPPLIED PER CUSTOMER REQUIREMENTS